
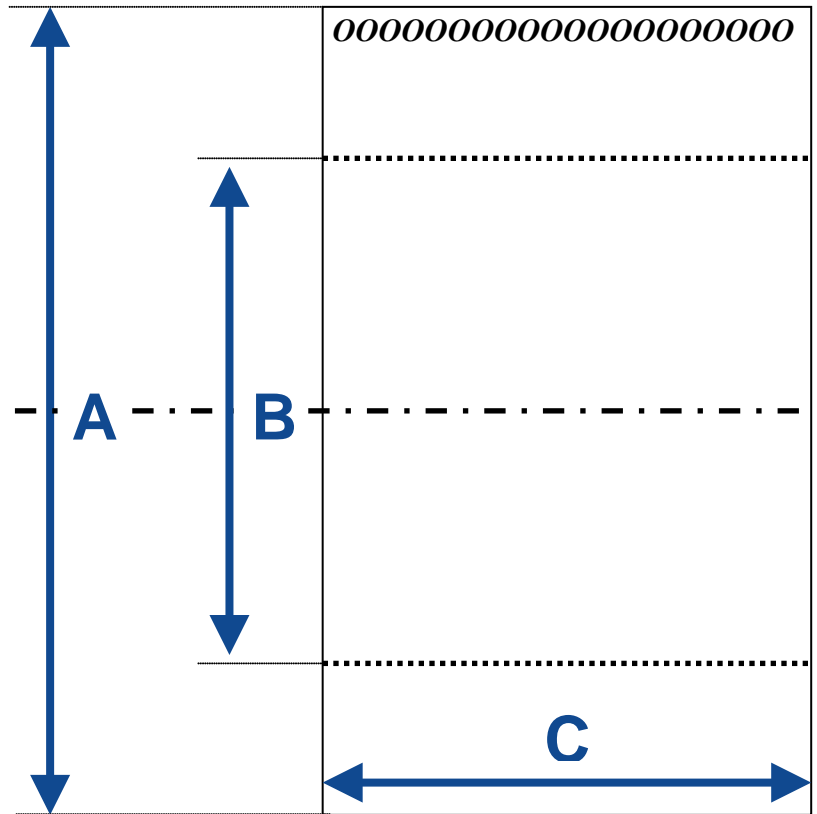


DIMENSIONS OF REELLESS COIL FOR PC STRAND

Grade	Strand Diameter	A	B	C	PACKS FROM DICKSON		PACKS FROM STOCKTON	
		Outside Diameter Inches*	Inside Diameter Inches	Width Inches	Typical Pack Length (feet)	Typical Pack Weight (pounds)	Typical Pack Length (feet)	Typical Pack Weight (pounds)
250K	3/8"	48	29.75	30.0	24,210	6,768	24,210	6,768
	7/16"				17,595	6,553	17,595	6,553
	1/2"				12,695	6,268	12,695	6,268
270K	3/8"				22,145	6,441	22,045	6,232
	7/16"				16,150	6,530	16,000	6,272
	1/2"				12,375	6,395	12,150	6,350
	0.52" (1/2"HBS)				11,930	6,808	12,000	6,700
	9/16"				10,515	6,897	10,000	6,757
	0.6"				8,845	6,670	8,900	6,690
	0.62"	8,300	6,757	8,300	6,757			

*Note: Outside diameter can vary due to coil length variations.

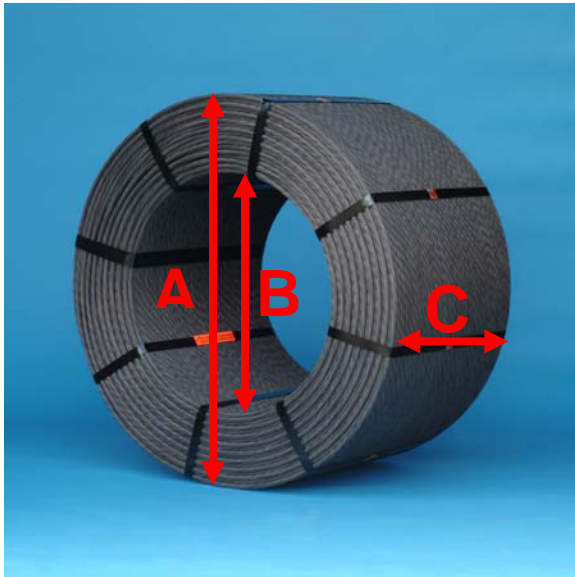

NOOR-National Office of Raw Materials of Pre-stressing Systems, LLC.

Headquarter Office:
 1133 Broadway, Manhattan, Suite 706,
 New York, NY 10010 .USA
 Tel: +1 (212) 631 5819
 Fax: +1 (212) 631 5820
www.noorprestressing.com

Australia:
 88 Phillip St, Sydney, NSW 2000,
 Fax: +6 (128) 0886 195
mtest@noorps.com
tsupport@noorps.com
www.noorps.com